

BROKIS®

MUFFINS

CM13022

PC986

INSTALLATION MANUAL

MUFFINS

Pendant light

Download

COMPONENTS INCLUDED WITH UNIT:

1× ceiling bracket with canopy
1× glass shade
1× wooden body
3× set screw M5×16
2× set screw M4×12
1× hex key size 1.5
1× hex key size 2
1× hex key size 2.5
1× brass ball
1× wire rope stop with ceiling anchor
1× plastic cable stop
3× WAGO connectors
3× silicone ring
3× silicone grommet
1× cotton gloves
1× installation manual

Installation time: 30 minutes / 2 persons

WARNING:

Installation must be carried out by a qualified electrician only!

Switch off power at main circuit panel prior to installation!

The manufacturer assumes no liability for damage occurring in transport or resulting from incorrect installation.

CLEANING THE GLASS

BROKIS upholds only the highest possible quality standards. Prior to shipping, the light undergoes several quality controls and stages of cleaning. Because transportation, storage, and the amount of time that passes between packing at our plant and subsequent unpacking by the client can affect the light in different ways, we strongly recommend cleaning it prior to assembly.
The glass must first be rinsed in warm water, and a dish detergent may be used to remove all foreign particles, dust, and grease. Repeat the process if necessary and then dry the glass thoroughly with a paper towel.

Recommendation: Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Do not use any cleaning agents containing silicone, as they may leave a film and attract dust and smudges.

PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS CHECKED THOROUGHLY. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.


BROKIS S.R.O.
ŠPANIELOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG. ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.COM


1. INSTALLING THE CEILING BRACKET AND WIRE ROPE CEILING ANCHOR

Using fasteners of sufficient strength (not included), secure the bracket and wire rope anchor to the ceiling.
With regard to various types of ceilings, we recommend consulting installation with an expert. The manufacturer assumes no liability for incorrect installation, the use of improper fasteners, or defects in the material to which the load-bearing components are secured.

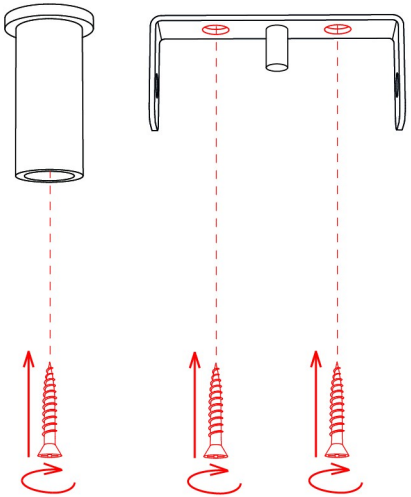


2. INSTALLING THE LIGHT SOURCE AND ASSEMBLING THE LIGHT

Install the light source in the fixture.
Insert 3 silicone grommets into the holes of the glass shade. Insert the glass shade into the wooden fixture so that the sticker with the logo located on the shade is opposite the hole for the cable in the wooden fixture. Simultaneously, adjust the holes for the adjusting screws in the wooden frame and on the glass shade so that they are opposite each other. Using size 2.5 hex key insert the three M5×16 set screws and tighten them until flush with the wooden body. Failure to tighten the screws sufficiently may result in the glass shade falling out of the wooden body; on the other hand, sinking the screws beneath the surface of the wooden body will almost certainly result in damage to the glass shade.
The manufacturer assumes no liability for damage resulting from incorrect installation of the set screws.

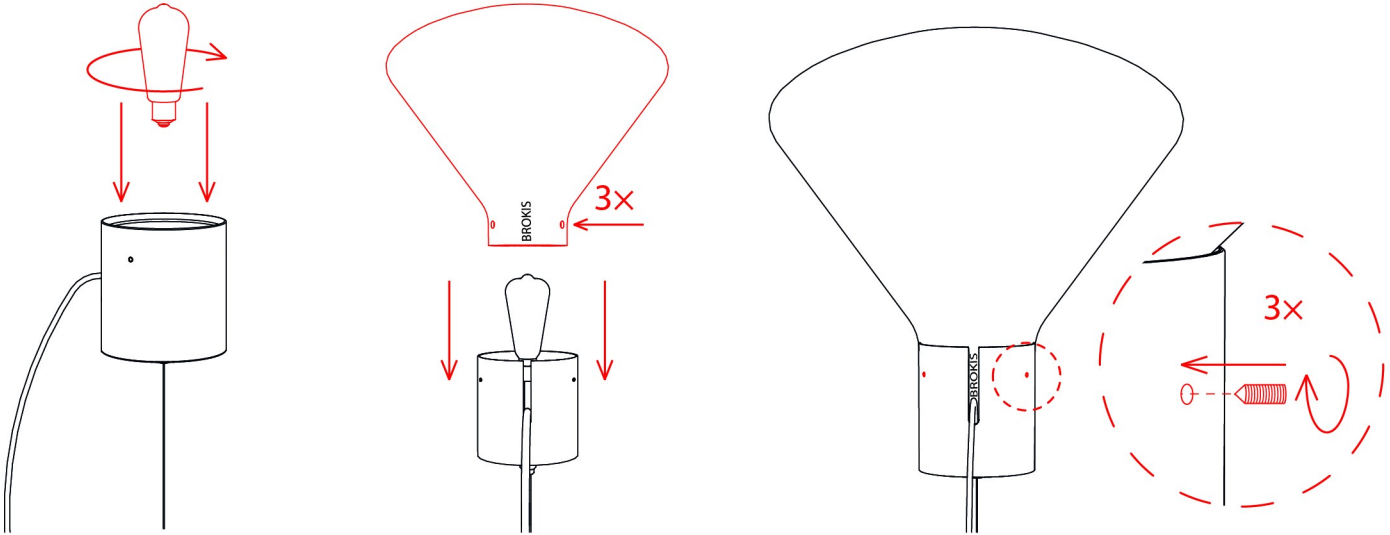


3. **INSTALLING THE LIGHT**

Ask an assistant to hold the assembled light (wooden body + glass shade).
Thread the silicone rings onto the wire rope (they serve to undulate the power cable) and pass the wire rope through the first part of the wire rope stop, the so-called safety. Loosen the cylinder on the inner part of the stop and slide it over the unfrayed wire rope at the correct length. Next, pass the wire rope through the hole in the side of the outer part of the stop. Screw the inner part into the outer part and tighten the cylinder on the stop. Never cut the wire rope prior to installation. Position the brass ball on the end of the wire rope and secure it in place with the hex key size 1.5.
Following these steps ensures the wire rope is securely anchored to the ceiling.

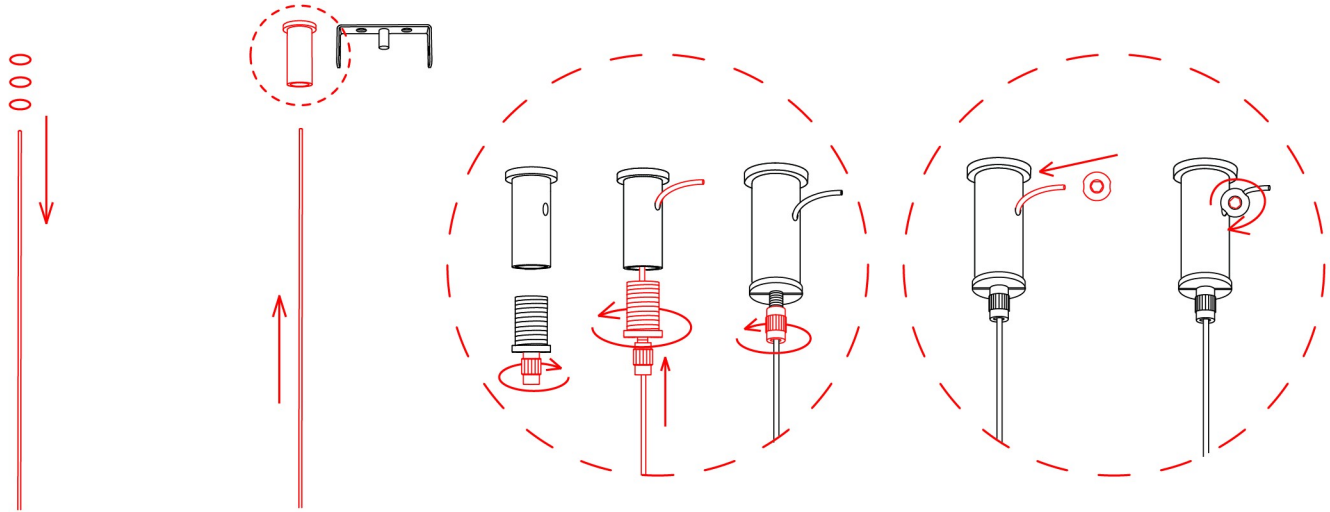


4. INSTALLING THE CEILING CANOPY

Pass the power cable through the silicone rings on the wire rope. Pass the power cable through the opening in the ceiling canopy. Pass the power cable through the plastic stop, adjust the length as needed, and then secure it by tightening the screw in the plastic stop.

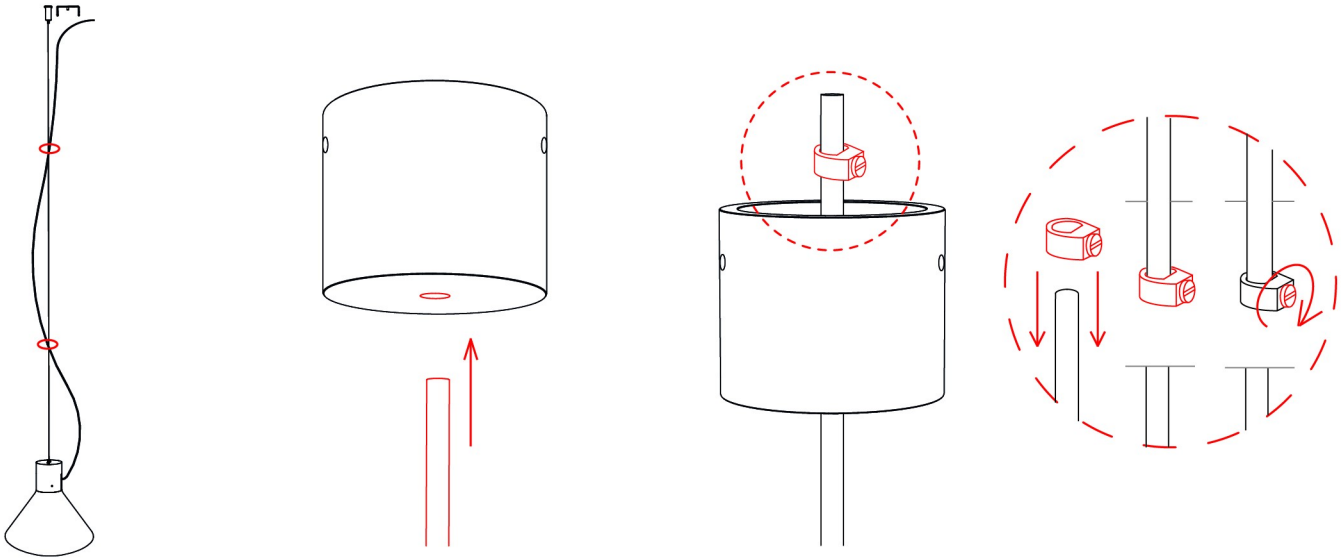


5. ELECTRICAL CONNECTION


Connect the light to the building wiring according to the connection diagram.

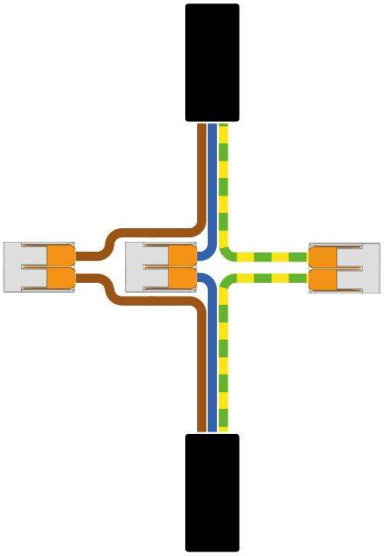

6. INSTALLING THE CEILING CANOPY

Using the two M4×12 set screws and size 2 hex key, attach the ceiling canopy to the bracket.

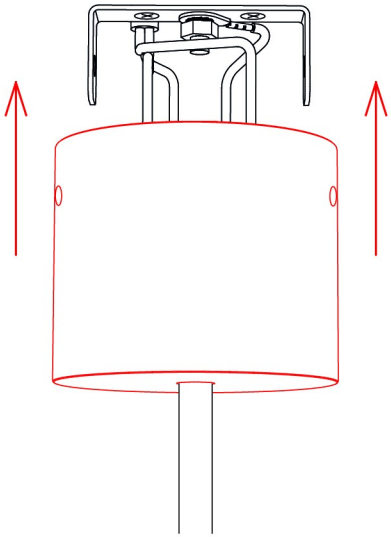

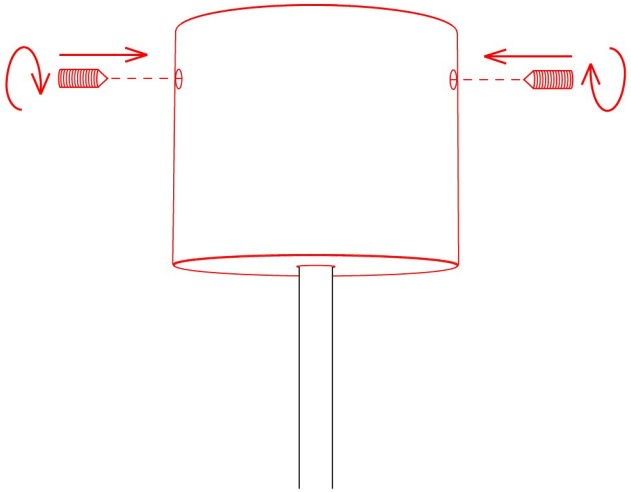

7. **SWITCHING ON THE LIGHT**

Restore power at the main circuit panel and verify that the light works properly.

