

BROKIS®

# SHADOWS XL

CM12306

PC976

# INSTALLATION MANUAL

## SHADOWS XL

Pendent light

Download

### COMPONENTS INCLUDED WITH UNIT:

1x glass shade, assembled wooden fixture with light source
1x wooden ceiling canopy with bracket
1x plastic cable stop
2x hex screws (M4x12)
1x hex key (size 2)
1x hex key (size 1.5)
3x terminal connectors
2x silicone pads
1x cotton gloves
1x installation manual

### WARNING:

**Installation must be carried out by a qualified electrician only.**

**Switch off power at main circuit panel prior to installation!**

**The manufacturer assumes no liability for damage occurring in transport or resulting from incorrect installation.**

**Installation time: 20 minutes / 1 person**

BROKIS®

BROKIS S.R.O.
ŠPANIELOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG. ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ

## CLEANING THE GLASS

**BROKIS applies the highest possible quality standards in manufacturing its lights. Prior to shipping, each light undergoes several quality controls and stages of cleaning. Lights may require additional cleaning as a result of transportation, storage, and the amount of time that passes between packing in our plant and subsequent unpacking by the client. Therefore, we emphasizes cleaning the lights prior to installation.**
**The glass must first be rinsed in hot water, with a dilution of a dish-detergent used to remove all foreign particles and dust. Eventually repeat this basic treatment, if necessary. Afterwards the glass must have a second cleaning using hot water, with a dilution of a de-greaser (such as ammonia or vinegar). The glass must then be thoroughly rinsed with running hot water. Eventually repeat this treatment, if necessary. The glass is then thoroughly dried with a paper towel or a clean soft cotton towel. Only re-assemble the glass to the lamp body, when completely cooled down.**
**Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Also: do not use products, containing silicones – since they will rapidly attract more dust and grease.**

**PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS THOROUGHLY TESTED. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.**




BROKIS S.R.O.
ŠPANIELOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG. ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ


## 1. INSTALLING THE CEILING BRACKET

Choose anchors of sufficient strength (not included) and secure the bracket to the ceiling. With regard to various types of ceilings, we recommend consulting installation with an expert. The manufacturer assumes no liability for incorrect installation, incorrect anchors, or defects in the material to which the bracket is secured.




## 2. INSTALLING THE POWER CABLE

Pass the power cable through the wooden canopy and secure it with a plastic cable stop.

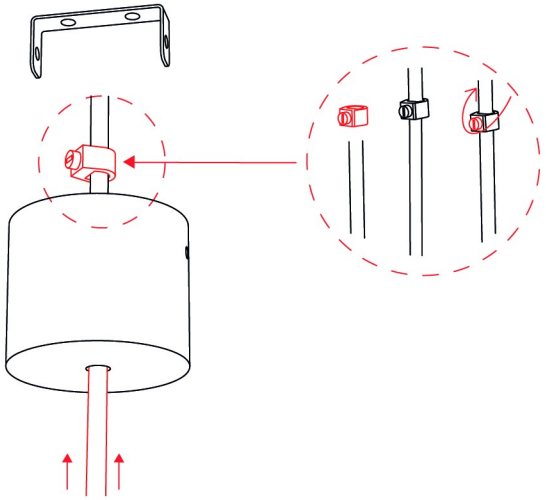


3. **CONNECTING THE LIGHT TO THE BUILDING WIRING**


Connect the light to the building wiring according to the connection diagram.

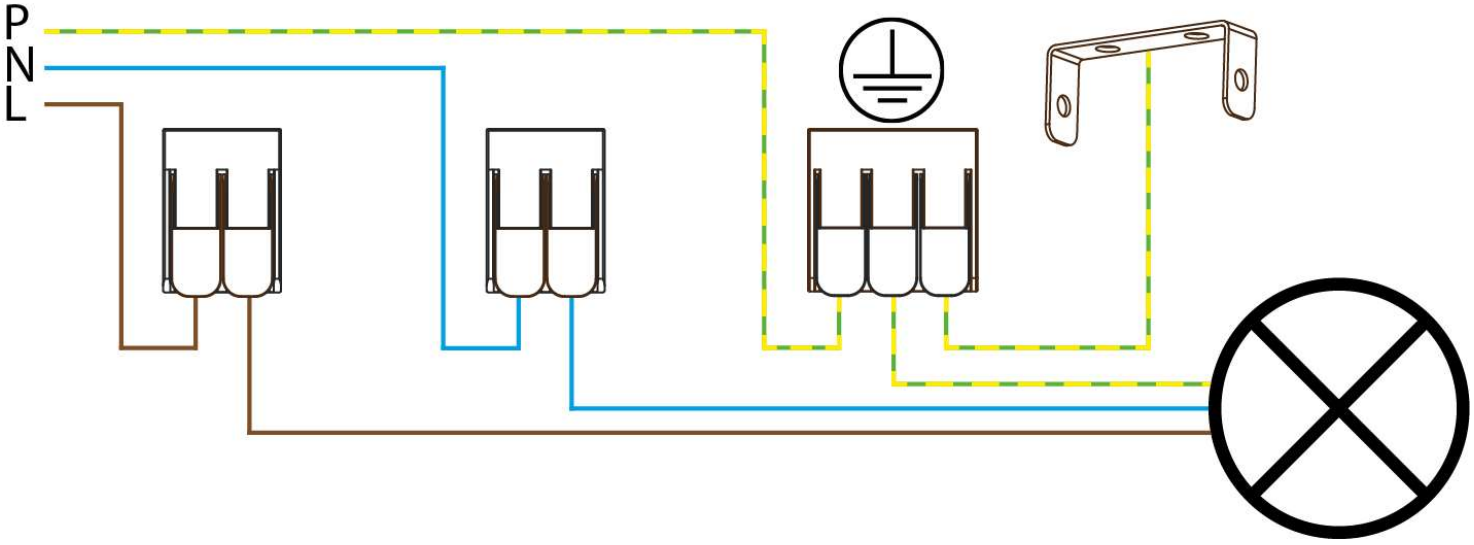

## 4. INSTALLING THE CEILING CANOPY


Attach the roof canopy to the bracket using two set screws and a size 2 hex key.

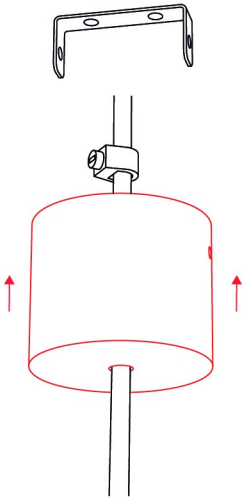

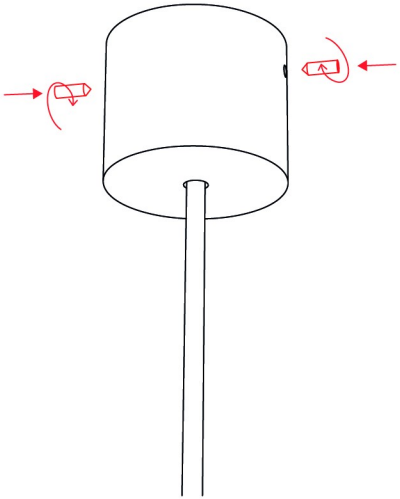

5.

Gently lower the glass shade onto the wooden fixture. If the shade is slightly off balance, carefully turn it on the wooden fixture, or attach one of the silicone pads to the fixture beneath the glass.
Connect the power cable to the metal fixture. Each half of the connector (male/female) has a positioning mark to ensure a proper connection. An incorrect connection may result in the light not working. Screw on the metal connector cover and secure the set screw with the 1.5 size of hex key.

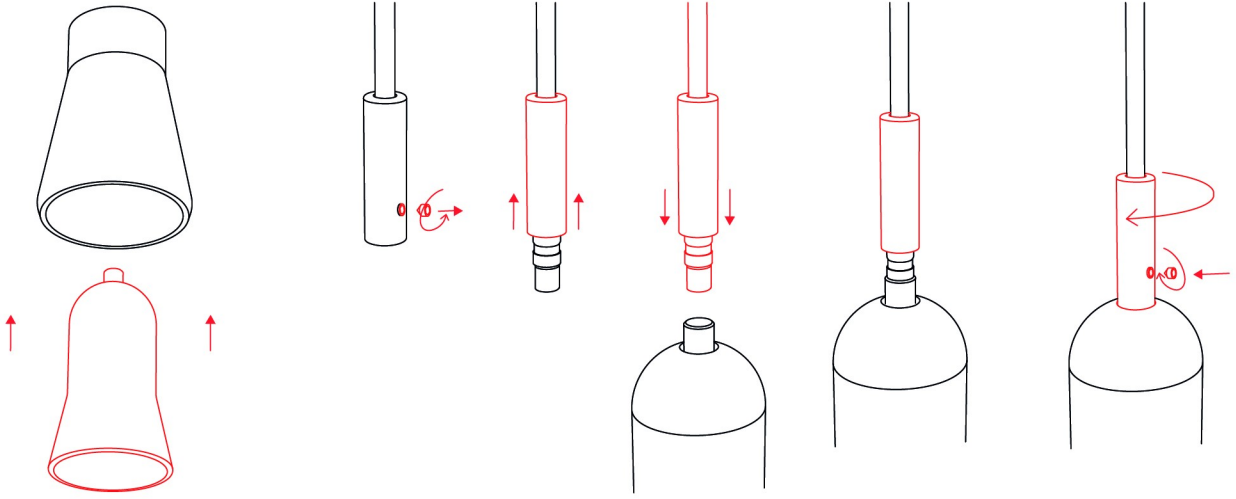

6. **SWITCHING ON THE LIGHT**

Restore power at the main circuit panel and verify that the light works properly.

